



Linear Task Light Fixture





Products Specification

Ordering Information

Example: ICS-BR-LTL-4-60-120V-50K-FR

	2' length	3' length	4' length		5' length	6' length	8' length
	ICS-BR-LTL-2-30	ICS-BR-LTL-3-40	ICS-BR-LTL-4-40	ICS-BR-LTL-4-60	ICS-BR-LTL-5-80	ICS-BR-LTL-6-90	ICS-BR-LTL-8-120
LED Wattage	30W	40W	40W	60W	80W	90W	120W
Input Voltage	120-277VAC 50/60Hz						
Luminous Flux*	3,900	5,200	5,200	7,800	10,400	11,700	15,600
Luminous Flux**	3,300	4,400	4,400	6,600	8,800	9,900	13,200
Efficiency	130 lm/watt						
LED Type	Samsung (standard)						
Lens Material	Polycarbonate with 93% transmission						
IP Rating	IP66						
CRI	≥82						
IK Rating (Impact)	10						
PF	>.99 @ 120VAC; >.94 @ 277VAC						
Certificates	CE, Rohs, ETL, DLC Premium						

Note: 8' (2400mm) - 600W/120VAC; 600W/277VAC

* Based on 5000K @ +/-10lm variance with clear lens

** Based on 5000K @ +/-10lm variance with frosted lens




Other option types and ordering details:

ORDERING DETAILS	OPTIONAL DESCRIPTIONS
120V, 277V, 347	Voltage types: 120V,100-277V, 120-347V
30K, 40K, 50K, 57K	3000-3500K, 4000-4500K, 5000-5500K, 5700-6000K
FR, CS	Lens: Frosted or Clear Striped




Photometric Pattern: Clear Lens

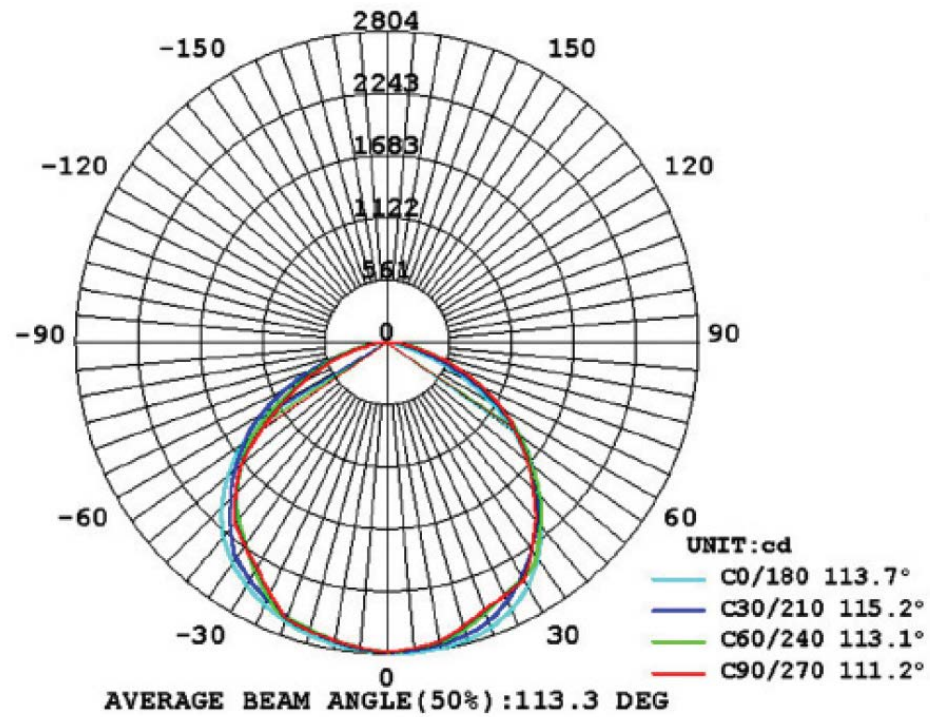



Design:

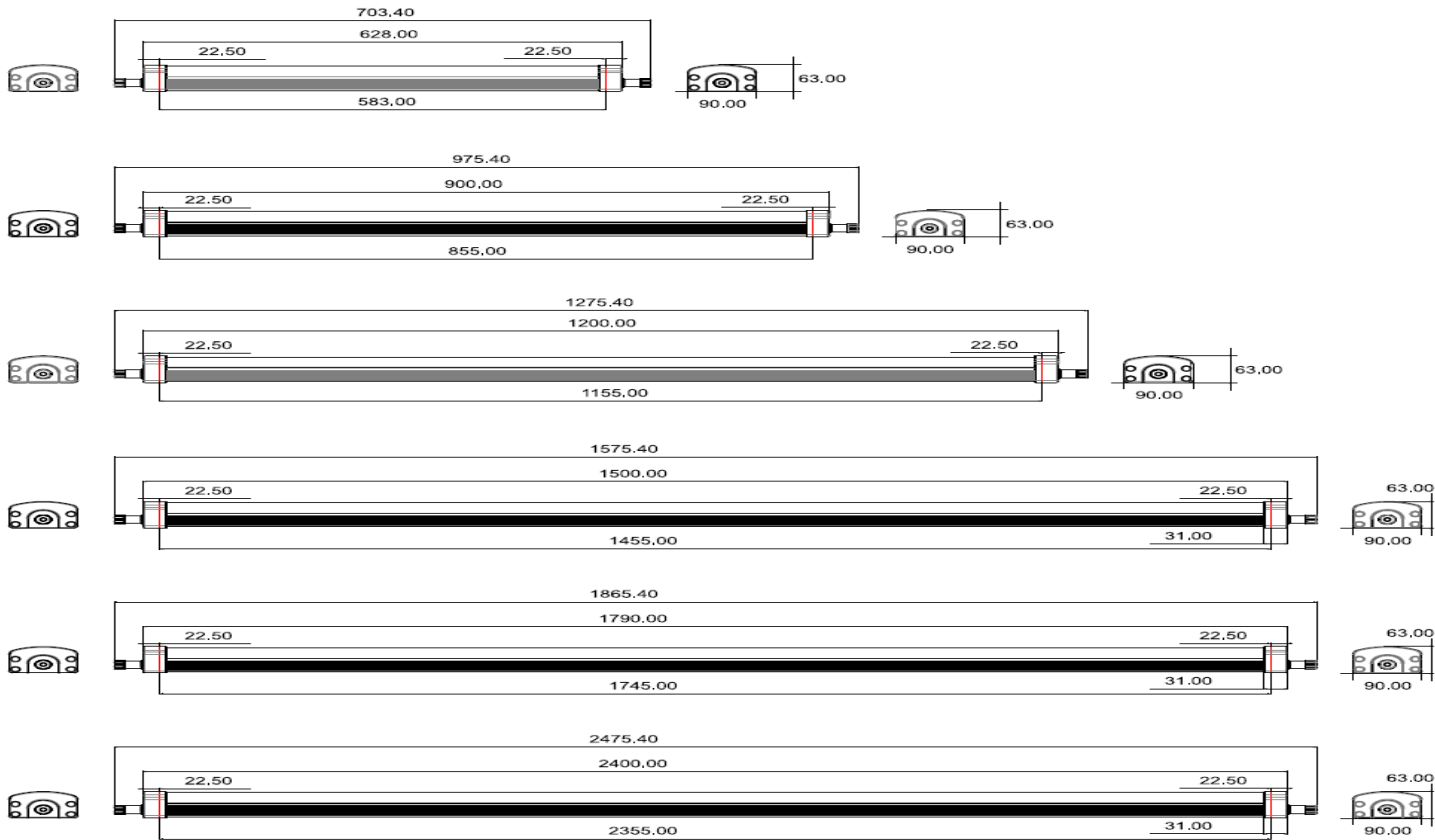




Mounting Options:

Ceiling Mount



Suspended Mount

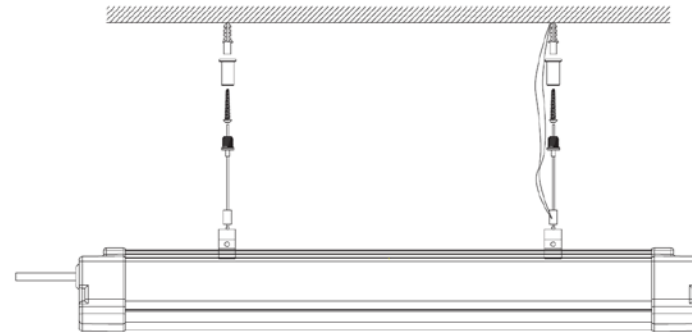




Connection Types:

In Series Connection (IP66)





Max Connection: 600W

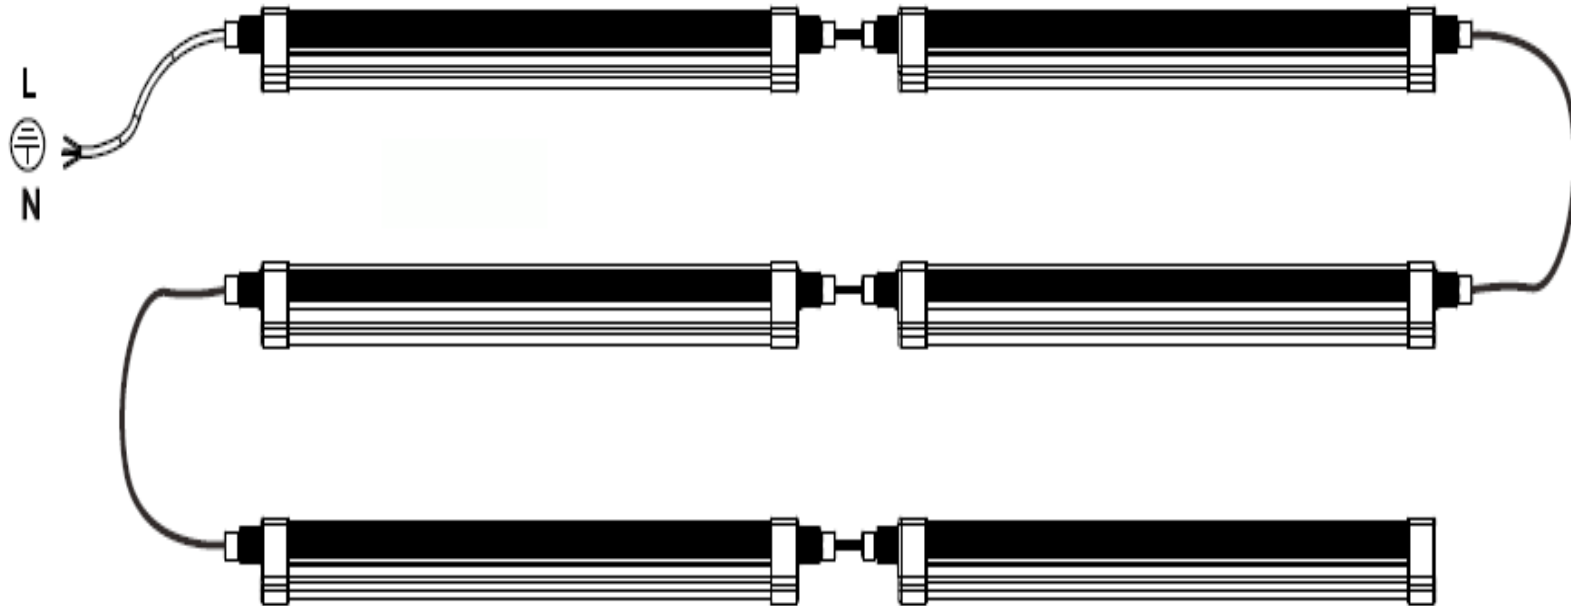



- UL Listed
- DLC Listed
- 5 year warranty
- Damp-proof, Dust-Proof, Water-proof, Impact-Proof (IK10) Lens
- L70 – at 50,000 hrs
- Easy and quick installation

Applications: Grocery Stores, Supermarkets, Gas Stations, Airports, Rail/Bus Stations, Parking Garages/Structures, Food & Drug processing Facilities, Commercial Freezers, Breweries, Industrial Warehouses, Factory Task Lighting, Car Washes

Products specifications, pictures, materials and details may change due to technology advancements. Bratic reserves the right to update any and all data without notification. Bratic T&C's of Sale apply.





